

INSTALLATION RECOMMENDATIONS

1. To slate around the ventilator use the template provided overleaf to cut out the sections of the lower two slates as shown in Fig. 1.
2. Cut the underlay to the shape and dimensions shown in Fig. 2, ensuring a snug fit to the ventilator spigot. Fold the triangular shaped flaps outwards under the vent to deflect and prevent water and debris penetration through the underlay.
3. Fit the ventilator as per normal slate. When using either natural or man-made slates, secure the tail of the vent, using a copper disc rivet, through the hole provided.
4. The base of the HD SRV10U ventilator may be trimmed along the 'trim lines' on the underside to suit a 500 x 250mm slate.
5. For soil pipe connection use adaptor HD SPA, see installation diagram.

Fig. 2


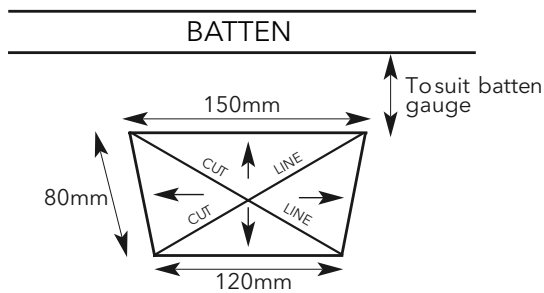


Fig. 1

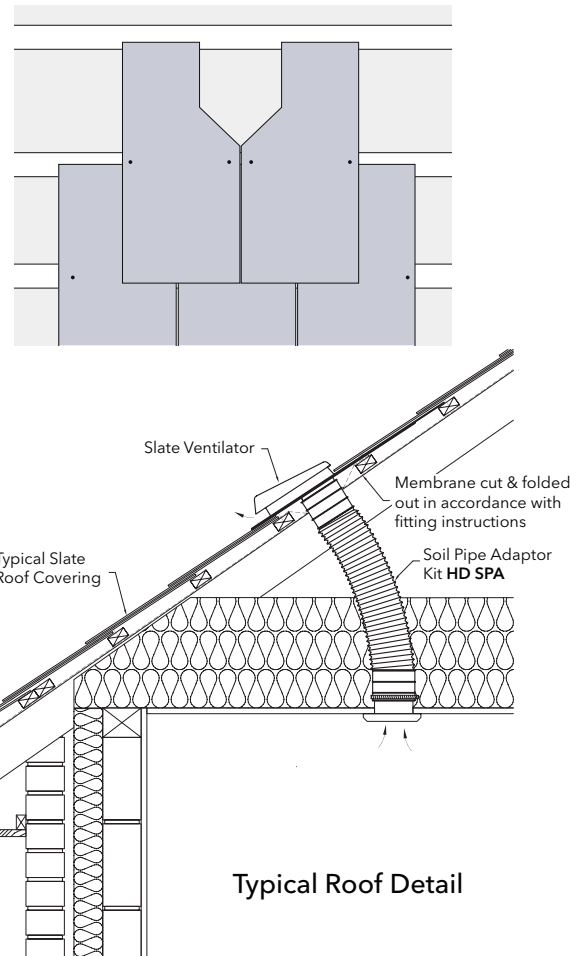



Trimming the Ventilator

HD SRV10U ONLY.

This ventilator has a standard base size of 600 x 300mm. If the ventilator is required for use with 500 x 250mm slates the size can be reduced by trimming between the lines marked on the underside of the ventilator body. Note that the head of the ventilator may be left untrimmed and the base longer than 500mm to reduce the trimming required on site unless specifically required.

See overleaf for cutting template.

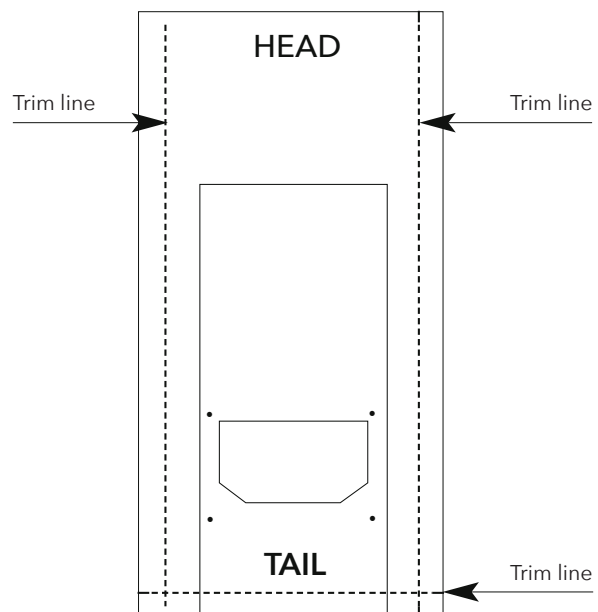

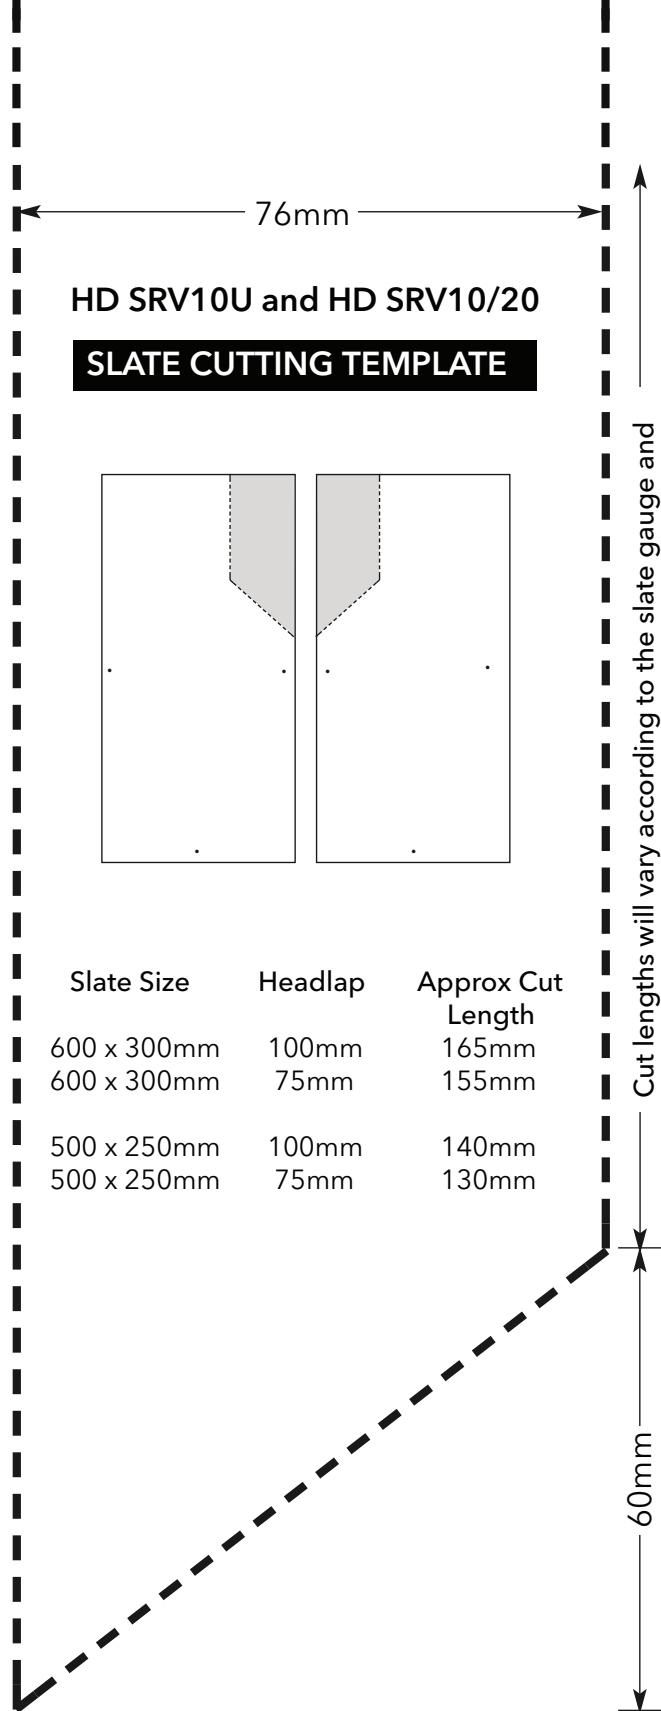

Slate Size	Headlap	Approx Cut Length
600 x 300mm	100mm	165mm
600 x 300mm	75mm	155mm
500 x 250mm	100mm	140mm
500 x 250mm	75mm	130mm

Cutting Template