

1.5m x 50m ROLL
120gsm

Danelaw® LR120T
 VAPOUR PERMEABLE ROOF UNDERLAY

1.5m x 50m ROLL
120gsm

Danelaw® LR120T

1.5m X 50m ROLL
120gsm


- Supported and unsupported applications
- Compliance with requirements to BS 5534 and BS 5250
- UV Resistant
- Lightweight and cost-effective
- High strength to weight ratio
- Cold and warm roof applications

BATTEN GAUGE	WIND UPLIFT RESISTANCE	WIND ZONES				
		1	2	3	4	5
≤345mm	1678 Pa	✓	✓	✓	✓	✓
≤250mm	2843 Pa	✓	✓	✓	✓	✓
≤100mm	>2843 Pa	✓	✓	✓	✓	✓

NOTE 1: Uplift resistance values and wind zones are for when integral lap tape is used. For lap restraint using battens only:
 ≤345 batten gauge, 1074 Pa wind zones 1 & 2.
 ≤250 batten gauge, 1873 Pa wind zones 1 to 5.

NOTE 2: Zone suitability applies only for underlays in applications where a well-sealed ceiling is present, ridge height is not greater than 15m, roof pitch is between 12.5° and 75°, site altitude is not greater than 100m, and no significant site topography is present. Other applications might require underlays with greater wind uplift resistance and it is advisable to seek professional advice.

NOTE 3: Zones 3 and 4 apply to Northern Ireland. Zone 3 applies to the Scilly Isles and Channel Islands. Zone 5 applies to the Shetland Islands.

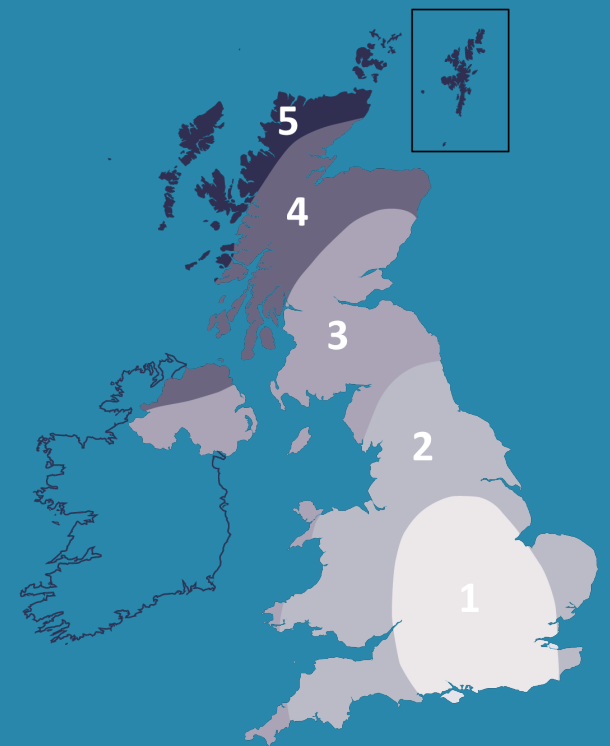

- Danelaw LR120T has been developed for use as a low resistance roof tile and slate underlay. It is intended for use on pitched roofs as a secondary barrier installed beneath tiles and slates. The product can be used draped unsupported over timber rafters and counter battens, or fully supported on timber sarking or rigid insulation.
- Danelaw LR120T has an integral lap tape system for effective sealing of the horizontal overlap.
- The product should be installed in accordance with the manufacturer's installation guidelines and relevant clauses in BS 5534; *Slating and tiling for pitched roofs and vertical cladding. Code of practice*, and BS8000, *Workmanship on building sites, Code of practice for slating and tiling of roofs and walls*.
- Danelaw LR120T will provide a secondary barrier to prevent the ingress of wind driven rain, snow and dust. It should be installed to ensure moisture in the batten cavity can drain freely down the roof and be discharged into the rainwater gutter at eaves.

DOP: 007HDL2017-03-01 Rev 01/2021	DOP: 011HDL2022-11-2 UKCA
EN 13859-1:2010	
Hambleside Danelaw Ltd Long March, NN11 4NR 17	
Flexible sheet for underlays Low resistance underlay for discontinuous roofing	

See overleaf for Installation Guidance

PRODUCT CODE: DLR120T 1.5



Danelaw[®] LR120T

Danelaw LR120T is UV resistant and can be exposed on site for a maximum period of three months. However, it is recommended that the product be protected by the outer roof covering as soon as is practicably possible and in keeping with good working practice.

Danelaw LR120T underlay should not come into contact with wet solvent or water based timber treatments. Operatives, particularly when using power tools, must prevent oil and petrol from spilling onto the surface of the underlay.

Danelaw LR120T is a type LR underlay as defined in BS 5250, Annex H. The underlay can be installed as part of a system without ventilation, subject to the construction of a well-sealed ceiling incorporating a vapour control layer. However, this is difficult to achieve in practice and is acknowledged as not being fail safe. Therefore, it is highly recommended that the ventilation guidelines in BS 5250, *Management of moisture in buildings, Code of practice* and *NHBC Standards Chapter 7.2 Pitched Roofs* are followed.

Installation Guidelines

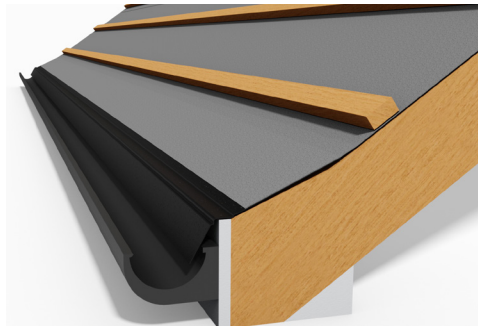


fig 1: Eaves detail

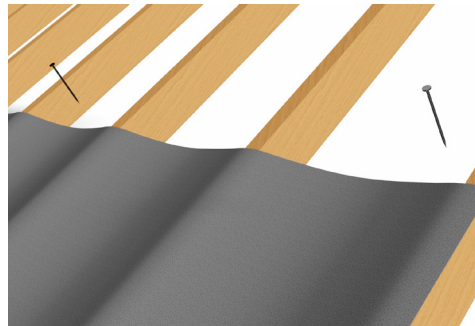


fig 2: Drape and nailing

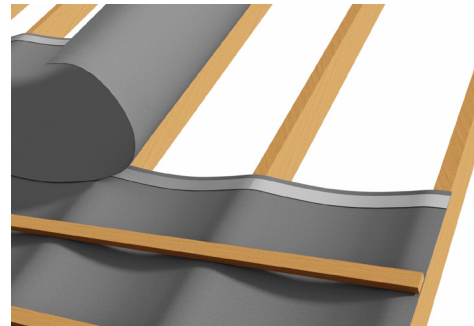


fig 3: Horizontal lap - Taped

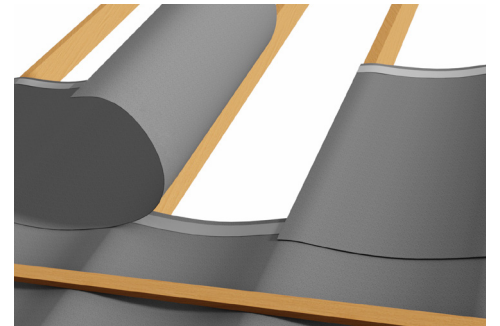


fig 4: Vertical lap

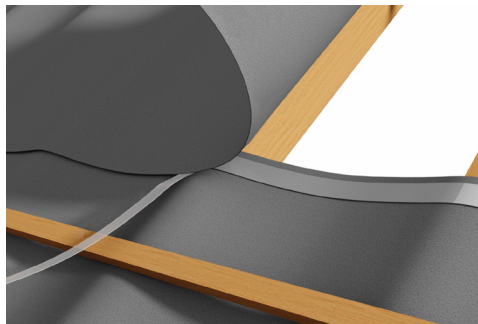


fig 5: Horizontal lap with peelback tape

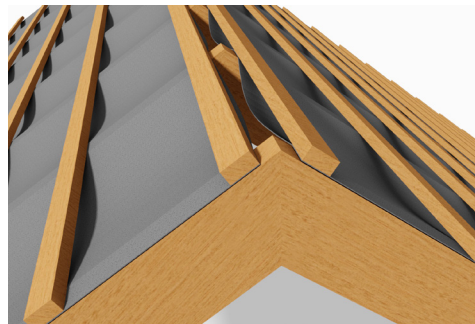


fig 6: Ridge ventilation

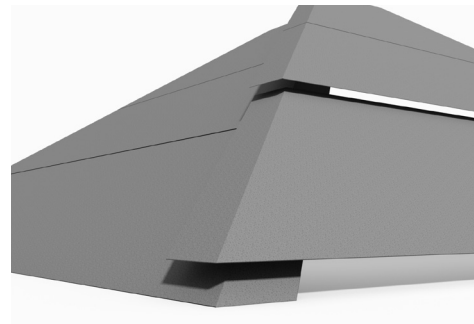


fig 7: Hip laps

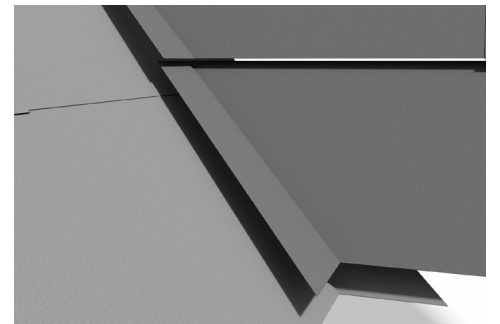


fig 8: Valley laps

1. Install Danelaw eaves support tray or a suitable UV resistant membrane (eg. BS 8747 type 5U) along the eaves with the bottom edge dressed into the rainwater gutter. The support tray ends should be lapped or clipped together, or the 5U laid over a wedge support timber fillet and lapped.
2. Lay Danelaw LR120T printed side facing outwards, parallel to the eaves with the bottom edge overlapping the support tray (fig. 1) or 5U membrane by 150mm. The edge of the Danelaw LR120T roof tile underlay should not be exposed to UV once the first course of tiles or slates are installed.
3. Where unsupported, the Danelaw LR120T should be installed with a drape over timber rafters or counter battens of not less than 10mm and not greater than 15mm. It should be temporarily secured with the minimum number of clout nails above the upper overlap line at maximum 1200mm horizontal centres (fig. 2). Minimise any gaps in the horizontal laps resulting from different tautness in the underlay courses. This is important to facilitate the effective sealing of the horizontal overlap using the integral tape. The tile or slate battens should be installed at the appropriate gauge and fixed to provide the main anchorage point for the underlay.
4. Continue laying each course of Danelaw LR120T working up the roof pitch in the same way. Ensure that the surface of the underlay to be adhered using the integral tape is clean, dry and free from dust. Peel back the release paper on of the adhesive strip on the underlay and press the two underlay layers together to form an effective seal (fig. 5). Continue working along the roof in this way to seal the full length of the horizontal overlap (fig. 3). Use the 150mm overlap line marked on the membrane to ensure the correct positioning.
5. Vertical overlaps should be a minimum of 100mm and coincide with rafter positions where the underlay is unsupported (fig. 4). The distance from fixing to the edge of the underlay should be a minimum of 50mm. Avoid vertical laps over the same rafter in consecutive courses.
6. Where ridge ventilation is not being provided, the Danelaw LR120T should extend over the ridge and overlap the underlay on the opposite side of the roof by the required amount. When being used in conjunction with ridge ventilation, the underlay should be cut or terminated and secured to ensure that the ventilation path remains clear along the length of the ridge (fig. 6).
7. The Danelaw LR120T should extend over any hips and overlap the underlay on the opposite side of the hip by not less than 150mm beyond the junction line (fig. 7). Alternatively, lay a strip not less than 600mm wide along the length of the hip and over the underlay on either side.
8. Where valleys occur, the Danelaw LR120T should be laid not less than 300mm beyond the centre line of the valley on each side (fig. 8). Where a continuous length of underlay is laid up the length of the valley, it should be a minimum of 600mm wide and the underlay from either side of the valley should be mitre cut to the appropriate line to suit the valley trough installation requirements.
9. The side and top edges of Danelaw LR120T underlay should be turned up at abutments by not less than 100mm to form a secondary water resistant barrier beneath the flashing or abutment detail.
10. At verges, the Danelaw LR120T underlay should lap onto the outer skin of the masonry by a minimum 50mm when mortar bedding, or extend beyond the face of the gable as required when a dry fix verge system is used. The underlay should be secured to the flying rafter for an overhanging verge.
11. At all penetrations, such as soil pipes, roof windows etc., the Danelaw LR120T underlay should be cut neatly and turned up against the penetration. For pipes etc., the underlay should be cut accurately to a ✱ shape and the flaps turned upwards and taped to minimise the risk of water ingress through the underlay.
12. Any damage to the Danelaw LR120T underlay can be repaired by replacing damaged areas with a patch. The patch should be applied to ensure water can safely drain down the roof pitch and a water-resistant barrier is maintained. The patch can be sealed using an appropriate tape or sealant strip.
13. When the lap lines on the underlay are followed, the integral tape effectively provides a sealed 150mm horizontal overlap. This size of sealed overlap is suitable for roof pitches from 12.5° to 35° and above. Please note that this does not apply to unsealed horizontal overlaps and in this instance the guidelines in BS 5534 should always be followed.

NB: Where the lap taping has not been used, or has become ineffective due to contamination or the presence of moisture, the wind uplift resistance and possibly wind zone suitability will be reduced in unsupported applications.

Rafter Pitch	Unsupported	Fully supported
12.5° to 14.5°	225mm	150mm
15° to 34.5°	150mm	100mm
35° and above	150mm	75mm

Essential Characteristics	Performance		Harmonised Technical Specification	
	Result			
Reaction to fire [class]	E-d2		EN 13859-1:2010 EN 13859-2:2010	
Dangerous substances	none			
Flexibility at low temperatures (°C)	-40			
Water vapour transmission properties Sd [m]	0,02 (+0,020/-0,005)			
Resistance to water penetration [class]	Before artificial ageing	W1		
	After artificial ageing	W1		
Tensile strength [N/50mm]	Longitudinal	Transverse		
	Before artificial ageing	280 (+/-40)		160 (+/-35)
	After artificial ageing	250 (+/-30)		130 (+/-20)
Elongation [%]	Longitudinal	Transverse		
	Before artificial ageing	65 (+/-15)		80 (+/-15)
	After artificial ageing	45 (+/-10)		55 (+/-10)
Resistance to tearing [class]	Longitudinal	Transverse		
	120 (+/-20)	135 (+/-20)		