

Installation Options


HD 12000M

For refurbishment and new build details to suit openings up to 10mm regulation requirements.


Airflow: 10,000mm² per metre run

Length: 1000mm **Height:** 19mm **Width:** 33mm


Abutment Installation

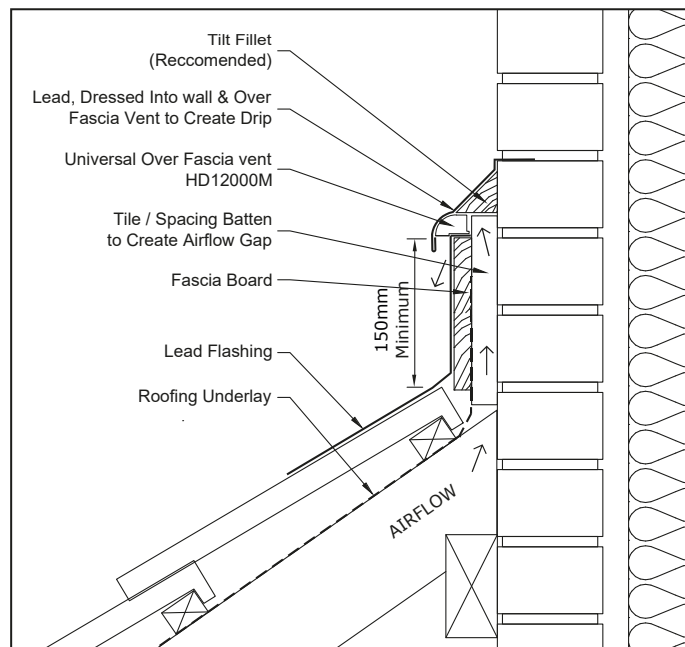

Mono Ridge Installation

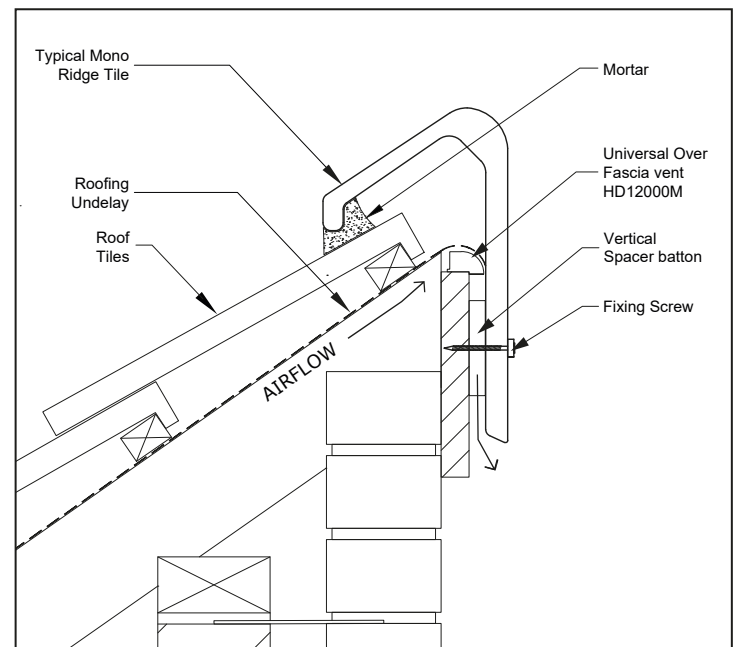

Layboard Installation

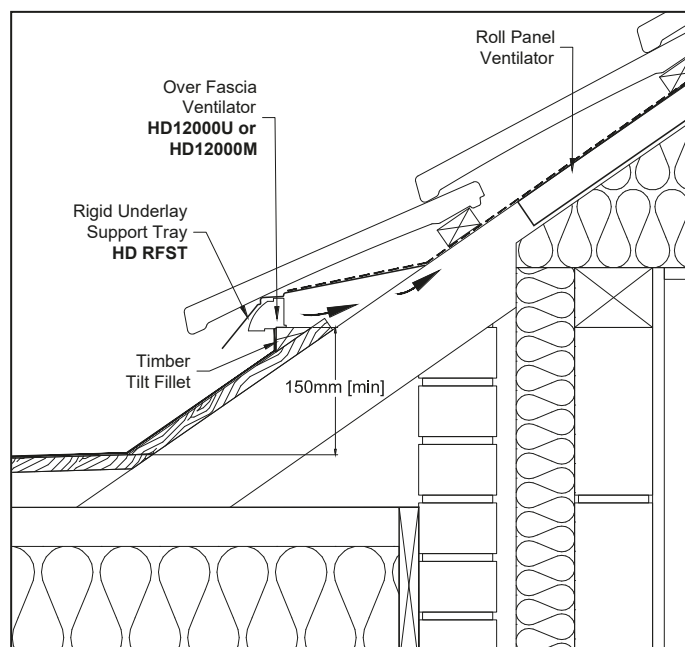

Installation Options


HD 12000U

For refurbishment and new build details - unique universal design to suit openings for both 10mm and 25mm regulation requirements.


For roof pitches below 15°, the HD 12000U should be fixed in the 25,000mm² airflow position as shown.

Length: 1000mm **Height:** 36mm **Width:** 48mm


Eaves Installation

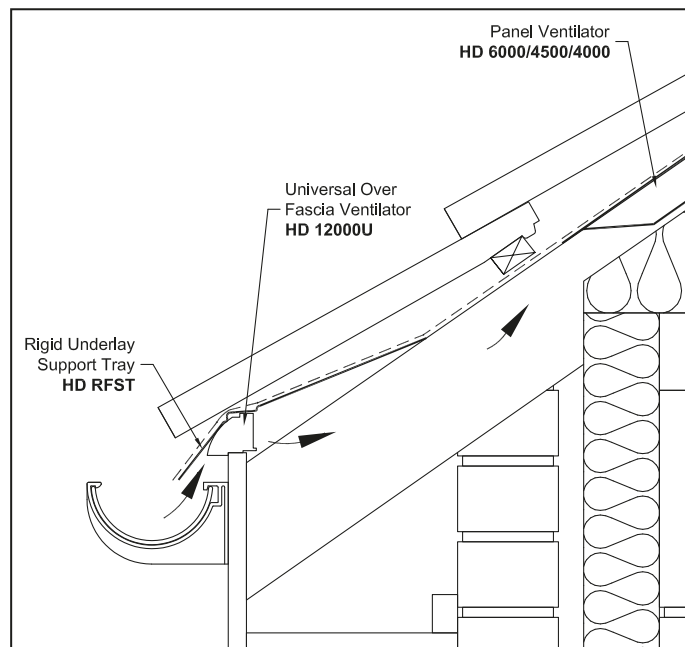

Layboard Installation

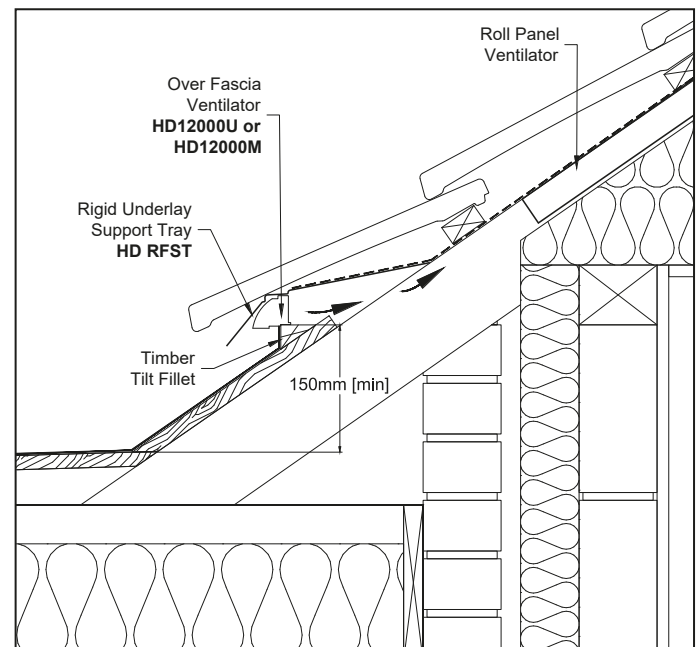

Flat Roof Abutment Installation

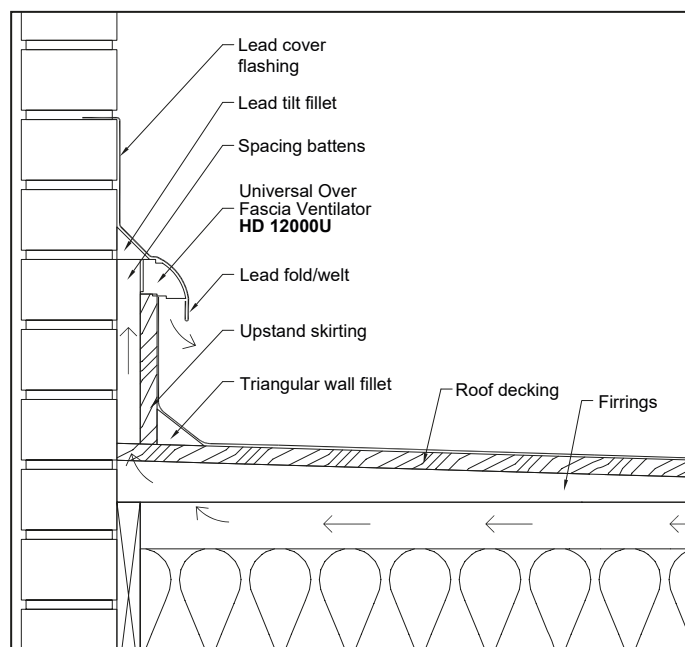

Flat Roof Eaves Installation

