



# VAPOUR PERMEABLE ROOF TILE AND SLATE UNDERLAY

Danelaw® LR120TT has been developed as a low resistance vapour permeable roof tile and slate underlay. It is intended for use on pitched roofs as a secondary barrier installed beneath tiles and slates. It can be used unsupported draped over timber rafters or counter battens, or fully supported over timber sarking or rigid insulation. The Danelaw® LR120TT has an integral tape to tape system for effectively sealing horizontal overlaps in moist and dusty conditions.

## FEATURES AND BENEFITS

- BBA approved for use in warm and cold roofs
- Classified as LR (Low Resistance) in accordance with BS 5250
- Integral tapes for effectively sealing overlaps
- Reduced condensation risk
- Durable and resistant to damage from foot traffic
- UV resistant
- Temporary weather protection prior to tile or slate fixing
- Contributes to weathertightness of a completed roof
- Airtight when sealed for improved energy efficiency

## STANDARDS AND CERTIFICATION

- Complies with the requirements BS 5534 *Slating & Tiling for pitched roofs and vertical cladding. Code of practice*
- Complies with the ventilation requirements in BS 5250 *Standard & NHBC Standards Chapter 7.2*
- CE marked in accordance with BS EN 13859-1
- BBA approved certificate number 17/5426



<b>CE</b>	<b>UK CA</b>
DOP: 005HDL2017-03-01 Rev 01/2021	DOP: 012HDL2022-11-2 UKCA
EN 13859-1:2010	
Hambleside Danelaw Ltd Long March, NN11 4NR 17	
22	
Flexible sheet for underlays <b>Low resistance underlay for discontinuous roofing</b>	



## PRODUCT CODES AND SIZES


Danelaw® LR120TT	1.0m x 50m	DLR120TT 1.0
Danelaw® LR120TT	1.5m x 50m	DLR120TT 1.5

The complete range of Danelaw® LR vapour permeable roof tile underlays are independently tested by the BRE. The zonal suitability for Danelaw® LR120TT, when used unsupported as follows:

BATTEN GAUGE	WIND UPLIFT RESISTANCE	WIND ZONES				
		1	2	3	4	5
≤ 345mm	3323 Pa	✓	✓	✓	✓	✓
≤ 250mm	>3323 Pa	✓	✓	✓	✓	✓
≤ 100mm	>3323 Pa	✓	✓	✓	✓	✓

**NOTE 1:** Zone suitability applies only for underlays in applications where a well-sealed ceiling is present, ridge height is not greater than 15m, roof pitch is between 12.5° and 75°, site altitude is not greater than 100m, and no significant site topography is present. Other applications might require underlays with greater wind uplift resistance and it is advisable to seek professional advice.

**NOTE 2:** Zones 3 and 4 apply to Northern Ireland. Zone 3 applies to the Scilly Isles and Channel Islands. Zone 5 applies to the Shetland Islands.

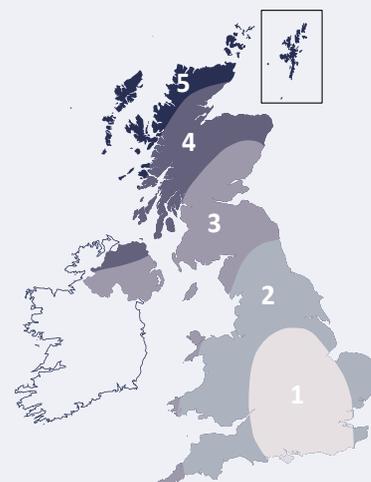


## APPLICATION

The product should be installed in accordance with the manufacturer's installation guidelines and relevant clauses in BS 5534; *Slating and tiling for pitched roofs and vertical cladding. Code of practice*, and BS 8000, *Workmanship on building sites, Code of practice for slating and tiling of roofs and walls*.

It is recommended that the ventilation guidelines in BS 5250 *Management of moisture in buildings, Code of practice* and *NHBC Standards Chapter 7.2 Pitched Roofs* are followed. The level of roof ventilation required will depend on the building type, condensation risk, roof configuration and overall size of the roof

## DESIGN APPLICATIONS

Danelaw® LR120TT with integrated tape can be installed draped over timber rafters or counter battens, or fully supported on sarking board or rigid insulation.

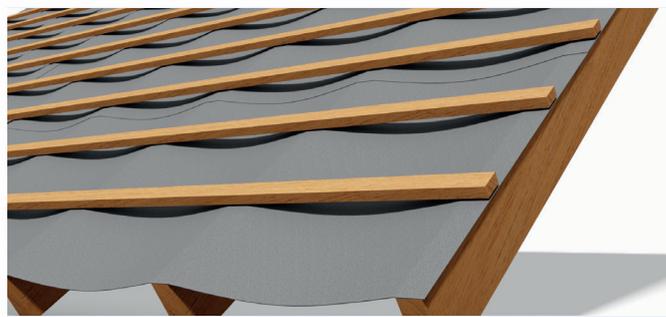

Draped over rafters - cold roof



Draped over rafters - fully supported warm roof

## TECHNICAL DATA

DANELAW® LR120TT		PERFORMANCE	EN 13859-1:2010 EN 13859-2:2010
Weight		120 gsm	
Roll length		50m	
Roll width		1.0m & 1.5m	
Resistance to water penetration [class]	Before artificial ageing	W1	
	After artificial ageing	W1	
Water vapour transmission properties [sd(m)]		0.02 (+0.020/-0.005)	
Resistance to penetration of air [m3/(m² x h x 50 Pa)]		0.05	
Tensile strength [N/50mm]	Before artificial ageing	<b>LONGITUDINAL</b> 245 (+/-45)	<b>TRANSVERSE</b> 175 (+/-45)
	After artificial ageing	210 (+/-45)	150 (+/-45)
Elongation [%]	Before artificial ageing	50 (+/-25)	60 (+/-25)
	After artificial ageing	30 (+/-20)	40 (+/-20)
Resistance to tearing [N]		130 (+/-30)	140 (+/-30)
Reaction to Fire [class]		E-d2	
Flexibility at low temperatures [°C]		- 40°C	
UV resistance [months]		3 months	

## RELATED PRODUCTS



Rigid Support Tray  
Product Code: HDRFST



Roofing Underlay Support Tray  
Product Code: HD 3000



**FOR ADDITIONAL HIGH VENTILATION**  
Dry Fix Rollout Ridge and Hip,  
Product Code: HD CON6,  
MONO6+, CLAY6+



**FOR ADDITIONAL LOW VENTILATION**  
Eaves and Soffits Vents  
HD 12000U and HD 8000

HDL\_LR120TT\_DatasheetV5.1\_May24